

PRODUCT DATASHEET

Black lamp cup, enhanced anti-glare,Led spot light HYD-342BR-12W 4000K



Application

- Home
- Restaurant
- Exhibition Hall
- Stage
- Conference Room
- Clothing Store

Benefits

- Flicker free
- It can be used for emphasis lighting and decorative lighting
- Spot light have prominent advantages in commercial lighting
- No secondary light spot, it can create a wall washing effect

Features

- Warranty 5 years
- PC,Good light transmission
- Small size, light weight, buckle design, easy to install
- Die-cast aluminum, good heat dissipation, reduce light decay





Electrical Data

Nominal wattage (W)	12W	
Nominal Voltage (V)	220-240 V	
Mains Frequency (Hz)	50	
Nominal Current (mA)	98	
LED Driver Current (mA)	300	
LED Driver Voltage (VDC)	30-42	
LED Driver Efficiency (%)	83%	
Power Factor λ	0.55C	
Total harmonic distortion (%)		
Operating mode	External LED driver	

Photometrical data

Luminous flux ±10% (lm)	715 lm	
Luminous efficacy	60 lm/w	
Color temperature	4000K	
Light color (designation)	Natural White	
Color rendering index Ra	≥80	
Standard deviation of color matching	≤5 SDCM	
Luminous intensity/cd	2895	
Flickering	Flicker free	
Beam angle	26 °	






Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

4000K



Dimensions & Weight

Diameter (mm)	105
Height (mm)	80
Product weight (g)	340

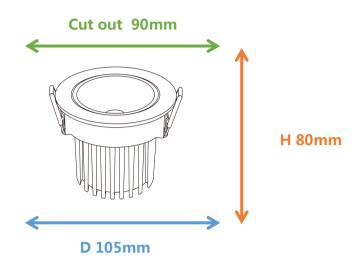

Material & Colors

Product color	Black Lamp cup / White Housing		
Housing color	White		
Body material	Aluminum		
Cover material	PC		
Mercury content	0.0 mg		

Application & Mounting

Ambient temperature range	-20°C~+45 °C		
Temperature range at storage	-20°C~+60 °C		
Type of connection	Screwless terminal		
Type of protection	IP20		
Dimmable	No		
Mounting type	Recessed		
Mounting location	Ceiling		
Application environment	Indoor		
Cut size (mm)	90		
LED module replaceable	Not replaceable		
With light source	Yes		



Certificates & Lifespan


Life (h)	50,000	
Certificates	CB CE LVD EMC	
Standards	ISO9001:2015	

Logistical Data

Product code	Dimensions	Pcs/	G.W.	Volume
	(L*W*H)	carton	kg	CBM
HYD-342BR-12W	•••			•••

This is the estimated data. Subject to the actual shipment.

Installation Method

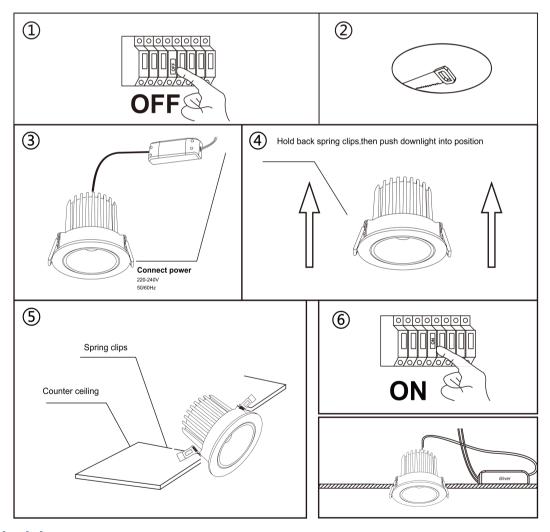

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.