

PRODUCT DATASHEET

IP65+All PC+High luminous efficiency - Wall Light HYD-02-20W 6500K



Application

- Villa
- Courtyard
- Doorway
- Balcony
- Corridor

Benefits

- Flicker free
- Lighting coverage area is wide
- Protection against water & dust, IP65
- Low power, high light efficiency, energy saving and environmental protection

Features

- Warranty 5 years
- All PC,Good light transmission
- High light transmission mask to ensure uniform light, reduce the dark area of the lighting environment





Electrical Data

| Nominal wattage (W) | 20W | |
|---------------------------|---------------------|--|
| Nominal Voltage (V) | 220 | |
| Mains Frequency (Hz) | 50 | |
| Nominal Current (mA) | 95 | |
| LED Driver Current (mA) | 330 | |
| LED Driver Voltage (VDC) | 60 | |
| LED Driver Efficiency (%) | 85% | |
| Power Factor λ | 0.9 | |
| Operating mode | Built in LED driver | |

Photometrical data

| Luminous flux ±10% (lm) | 2362 lm | |
|--------------------------------------|--------------|--|
| Luminous efficacy | 116 lm/w | |
| Color temperature | 6500K | |
| Light color (designation) | Cold White | |
| Color rendering index Ra | ≥80 | |
| Standard deviation of color matching | ≤5 SDCM | |
| Luminous intensity/cd | 653 cd | |
| Flickering | Flicker free | |
| Beam angle | 123 ° | |






Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

IES



Dimensions & Weight

| Diameter (mm) | 144*270 | |
|--------------------|---------|--|
| Height (mm) | 68.5 | |
| Product weight (g) | 359 | |

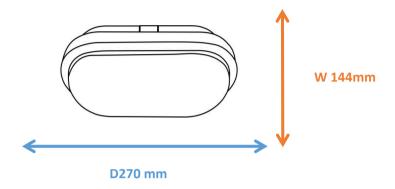

Material & Colors

| Product color | All White | |
|-----------------|-----------|--|
| Housing color | White | |
| Body material | PC | |
| Cover material | PC | |
| Reflector color | White | |
| Mercury content | 0.0 mg | |

Application & Mounting

| Ambient temperature range | -30°C~+50 °C | | |
|------------------------------|-----------------|--|--|
| Temperature range at storage | -40°C~+50 °C | | |
| Type of connection | Screw terminal | | |
| Type of protection | IP65 | | |
| Dimmable | No | | |
| Mounting type | Surface mounted | | |
| Mounting location | Wall/Ceiling | | |
| Application environment | Indoor/Outdoor | | |
| Cut size (mm) | No | | |
| LED module replaceable | Not replaceable | | |
| With light source | Yes | | |




Certificates & Lifespan


| Life (h) | 50,000 | |
|--------------|---------------|--|
| Certificates | CB CE LVD EMC | |
| Standards | ISO9001:2015 | |


Logistical Data


| Product code | Dimensions | Pcs/ | G.W. | Volume |
|--------------|---------------|--------|------|------------|
| | (L*W*H) | carton | kg | CBM |
| HYD-O2-20W | 49*39.5*58 cm | 30 | | 0.11226 m³ |

Installation Method









Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.